



器具光束	45,500 lm
上方光束	0 lm
下方光束	45,500 lm
最大光度	50,363 cd

初期値
A断面

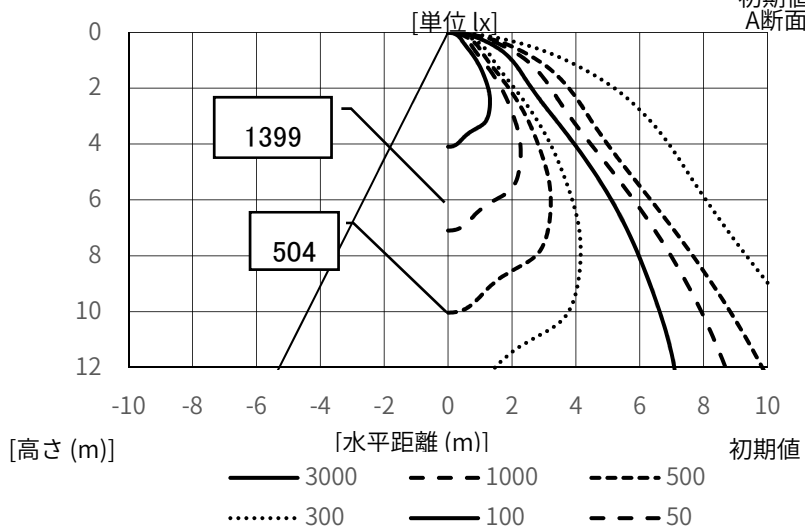

光源	LED
光源型名	-
口金形式	-
色温度	昼白色(5000K)
保守率	良0.92 中0.89 否0.85
最大取付間隔	A-A' 0.88 H
備考	

角度	光度 [cd/1,000lm]	
	A-A'	B-B'
0	1107	—
5	1034	—
10	902	—
15	856	—
20	817	—
25	683	—
30	515	—
35	326	—
40	189	—
45	93	—
50	48	—
55	34	—
60	28	—
65	23	—
70	18	—
75	12	—
80	7	—
85	2	—
90	0	—

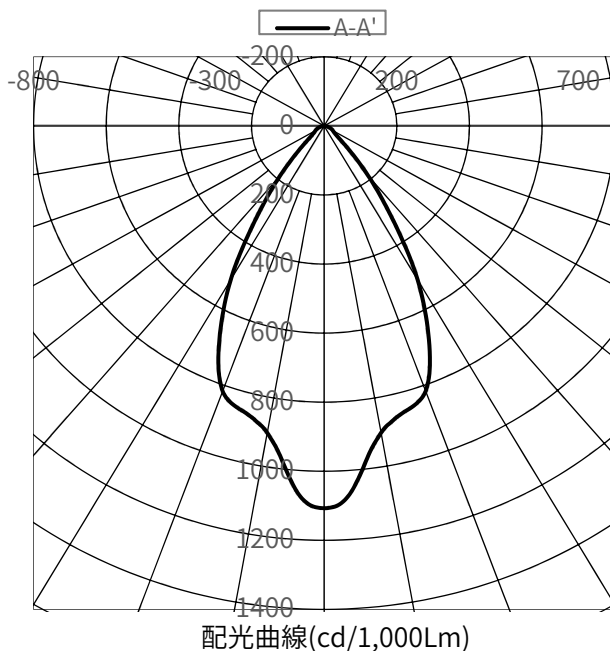

反射率	天井						壁						床																															
	70		80		30		70		50		30		50		30		20		0																									
室指数	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
0.6	89	82	79	75	73	71	87	81	78	75	72	71	77	74	72	70	71	70	67	66																								
0.8	97	88	88	82	81	78	95	87	87	82	81	78	85	81	80	77	79	77	74	73																								
1.0	103	92	94	87	87	83	101	91	92	86	87	83	90	85	85	82	84	81	79	78																								
1.25	108	96	99	91	93	87	105	95	97	90	92	87	94	89	90	86	88	85	83	82																								
1.5	111	98	103	93	97	90	108	97	101	93	96	90	98	91	93	89	91	88	86	84																								
2.0	115	100	109	97	103	94	112	99	106	96	101	94	102	95	98	92	95	91	89	88																								
2.5	118	102	112	99	108	97	115	101	110	98	105	96	105	97	101	95	97	94	92	90																								
3.0	120	103	115	101	111	99	117	102	112	100	108	98	107	98	104	96	99	95	93	92																								
4.0	123	105	119	103	115	101	119	104	115	102	112	100	109	100	107	99	102	97	95	94																								
5.0	125	106	121	104	118	102	121	104	117	103	115	102	111	101	109	100	103	98	97	95																								
7.0	127	107	124	105	121	104	122	105	120	104	118	103	113	102	111	101	105	100	98	96																								
10	128	107	126	106	124	106	124	106	122	105	120	105	114	103	113	103	107	101	99	98																								